REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1. REPORT DATE *(DD-MM-YYYY)*	2. REPORT TYPE	3. DATES COVERED *(From - To)*
	Technical Papers	

4. TITLE AND SUBTITLE	5a. CONTRACT NUMBER
	5b. GRANT NUMBER
	5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S)	5d. PROJECT NUMBER
	5e. TASK NUMBER
	5f. WORK UNIT NUMBER

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)	8. PERFORMING ORGANIZATION REPORT
Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)	**10. SPONSOR/MONITOR'S ACRONYM(S)**
Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048	**11. SPONSOR/MONITOR'S NUMBER(S)**

12. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

13. SUPPLEMENTARY NOTES

14. ABSTRACT

15. SUBJECT TERMS

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
					Leilani Richardson
a. REPORT	b. ABSTRACT	c. THIS PAGE	A		19b. TELEPHONE NUMBER *(include area code)*
Unclassified	Unclassified	Unclassified			(661) 275-5015

41 items enclosed

OSHTKAC TP-1998-138

MEMORANDUM FOR PRS (Contractor Publication)

FROM: PROI (TI) (STINFO)

6 July 1998

SUBJECT: Authorization for Release of Technical Information, Control Number: **AFRL-PR-ED-TP-1998-138**
William H. Cahoun Jr (SPARTA), "Evaluation of Afterburning Cessation Mechanisms in Fuel Rich Rocket Exhaust"

AIAA (Vu-Graphs)

(Statement A)

EVALUATION OF AFTERBURNING CESSATION MECHANISMS IN FUEL RICH ROCKET EXHAUST PLUMES

W. H. CALHOON, JR.
SPARTA, INC.
AIR FORCE RESEARCH LABORATORY
EDWARDS AFB, CA

34 AIAA/ASME/SAE/ASEE JOINT PROPULSION CONFERENCE
JULY 13-15, 1998

BACKGROUND

CHARACTERISTIC OF MANY ROCKET PROPULSION SYSTEMS:

- RUN FUEL RICH FOR PERFORMANCE REASONS
- EXHIBIT STRONG AFTERBURNING OF EXHAUST WITH THE ATMOSPHERE
- HIGH RADIATIVE EMISSIONS

AFTERBURNING AND AFTERBURNING CESSATION IMPORTANT TO:

- MISSILE BASE COMPONENT DESIGN (RADIATIVE HEAT TRANSFER)
- MISSILE TYPING, TRACKING AND INTERCEPT SYSTEMS

CHARACTERIZATION OF AFTERBURNING CESSATION EVENT

<u>TWO BASIC TYPES OF CESSATION EVENT</u>:

1) GRADUAL TOTAL INTENSITY DROP-OFF

- **SHUTDOWN OCCURS OVER WIDE ALTITUDE RANGE**

2) RAPID TOTAL INTENSITY DROP-OFF

- **SHUTDOWN OCCURS OVER NARROW ALTITUDE RANGE**

POSSIBLE MECHANISMS RESPONSIBLE FOR AFTERBURNING CESSATION

- **SHEAR LAYER RELAMINARIZATION (VELOCITY MATCHING):**
  - AFTERBURNING INHIBITED BY LACK OF TURBULENT MIXING
- **DAMKOHLER NUMBER EFFECT:**
  - DAMKOHLER NUMBER IS RATIO OF MIXING AND CHEMICAL TIME SCALES
  - LARGE SCALE TURBULENT MIXING COOLS PLUME FASTER THAN AFTERBURNING HEATS THE PLUME (LOW DAMKOHLER NUMBER)
- **CLASSICAL FLAME EXTINCTION MECHANISM:**
  - HIGH TURBULENT MIXING RATES AT THE SMALL SCALES CAUSES LOCAL FLAME EXTINCTION AND EVENTUAL AFTERBURNING CESSATION

OBJECTIVES

1) ASSESS THE RELEVANCE OF AFTERBURNING CESSATION MECHANISMS IN FUEL RICH PLUMES

2) MAKE MODELING ENHANCEMENT RECOMMENDATIONS FOR ENGINEERING LEVEL PREDICTIVE CODES

ACCOMPLISHED OBJECTIVES THROUGH A COMPUTATIONAL PARAMETRIC STUDY OF A GENERIC AMINE BOOSTER.

COMPUTATIONAL METHODOLOGY

- **SIMULATIONS ACCOMPLISHED USING THE "GASP" CODE:**
  - GENERAL AERODYNAMIC SOLVER FOR COMPRESSIBLE REACTING FLOWS
  - INCLUDES MODERN, WIDELY ACCEPTED TURBULENCE MODELS
  - DRAWBACK: NEGLECTS THE EFFECT OF TURBULENCE-CHEMISTRY INTERACTIONS

- **MISSILE MODELING:**
  - SIMULATE THE ENTIRE MISSILE BODY, BASE AND PLUME
  - ASSUME ONLY AXISYMMETRIC BODY CONFIGURATION

PARAMETRIC STUDY SIMULATION MATRIX

Case	Turbulence	Chemistry
A	yes	finite rate
B	yes	frozen
C	no	finite rate
D	yes, enhanced	finite rate

PREDICTED TOTAL RADIANT INTENSITY

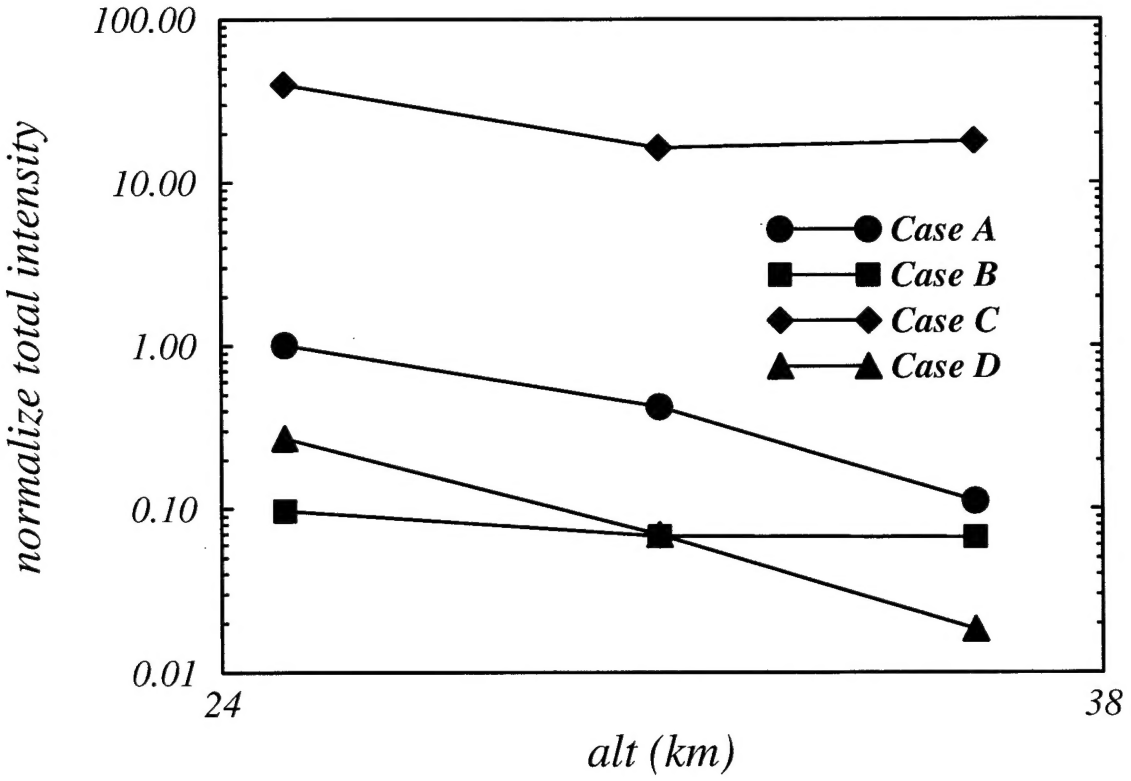

REYNOLDS NUMBER ALONG THE PLUME SHEAR LAYER AT 35 KM

$$Re = \overline{\rho}\Delta U \delta_1 / \overline{\mu}$$

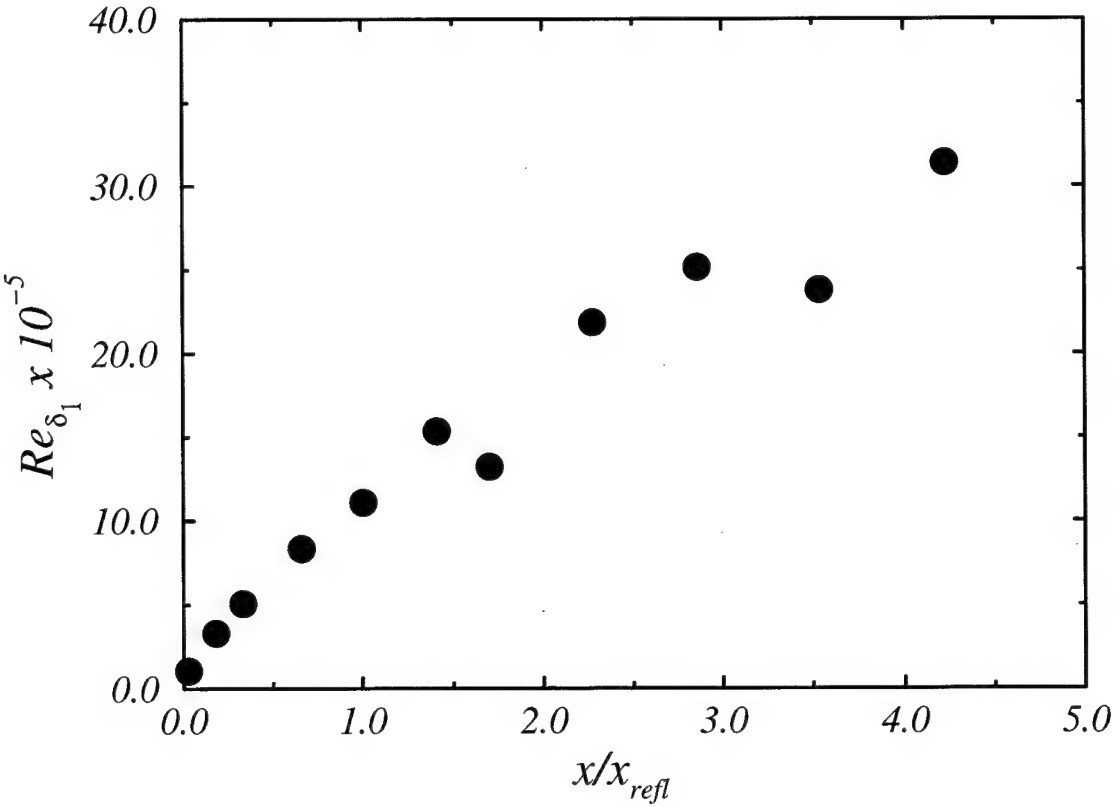

DAMKOHLER NUMBER VARIATION WITH ALTITUDE

$$Da = \tau_{mix}/\tau_{chem}$$

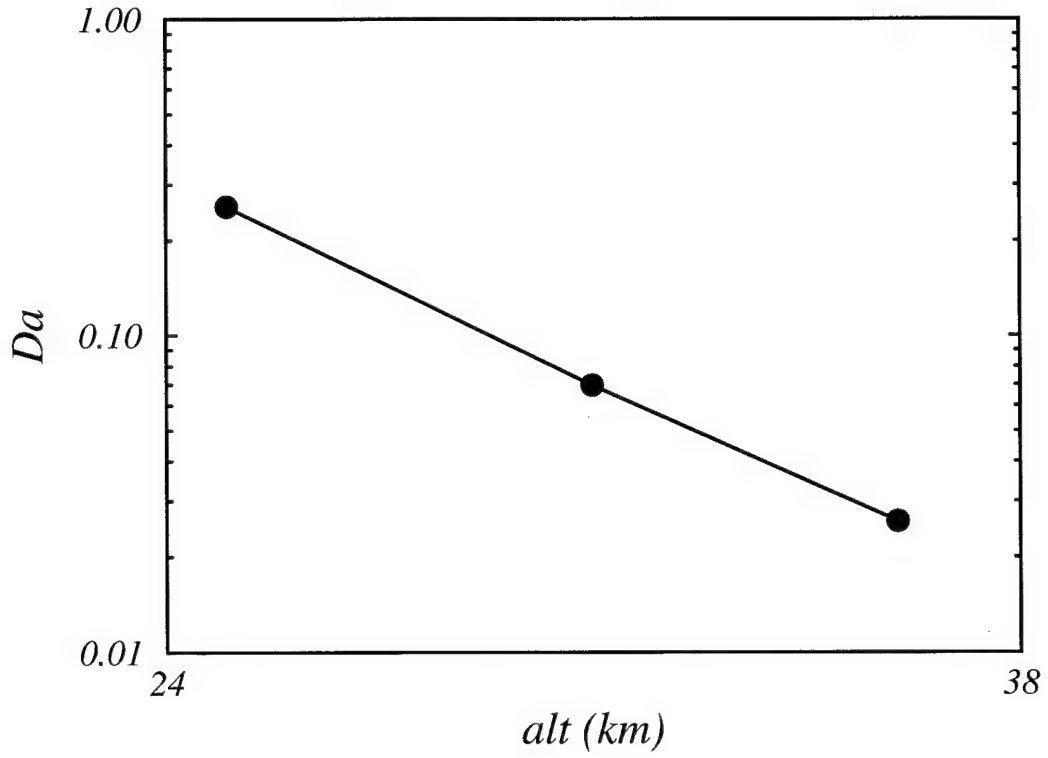

PREDICTED SMALL SCALE STRAIN RATE ACROSS THE PLUME

$x/x_{refl} = 2$

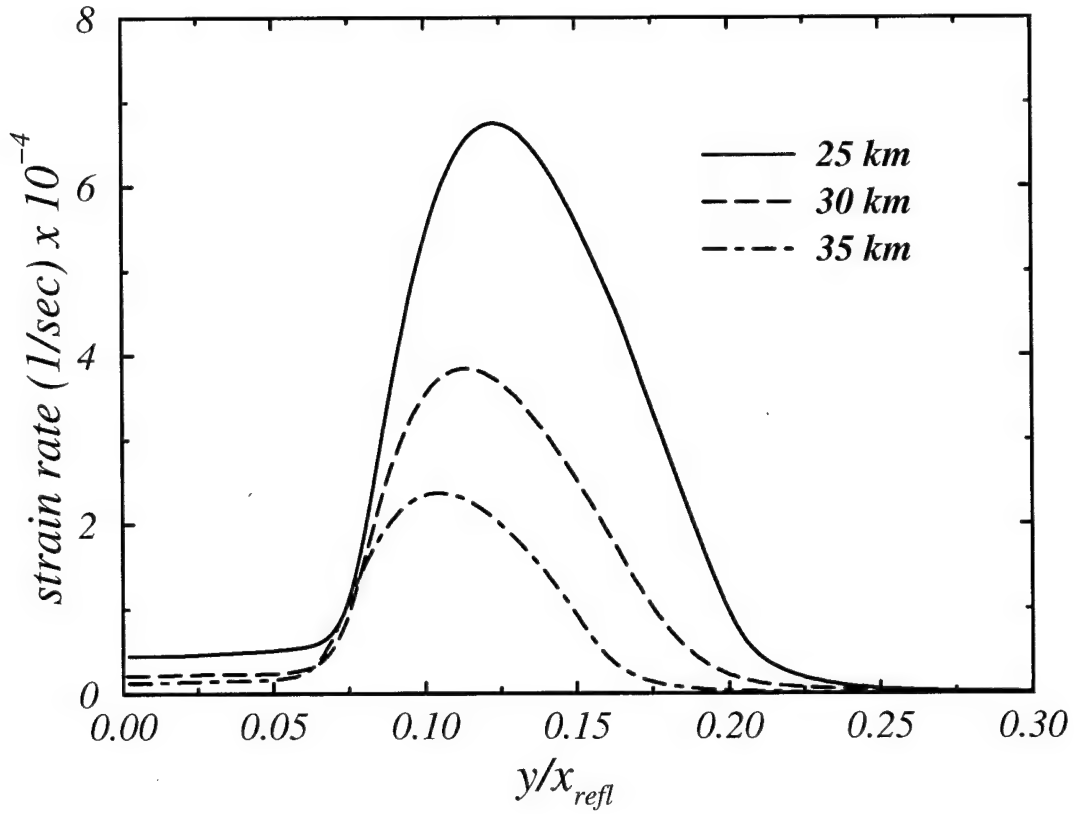

CONTOUR PLOT OF THE EXTINCTION MODEL BINARY SWITCH

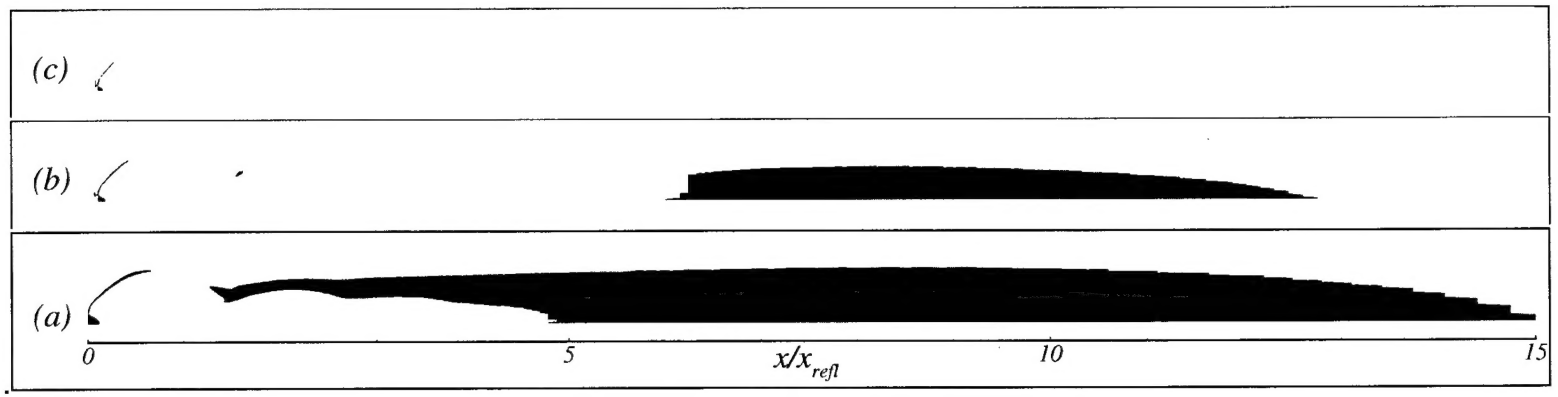

SPARTA
Pride In Performance

COMPARISON OF TEMPERATURE CONTOURS FOR THE ORIGINAL CODE AND WITH EXTINCTION MODEL AT 30 KM

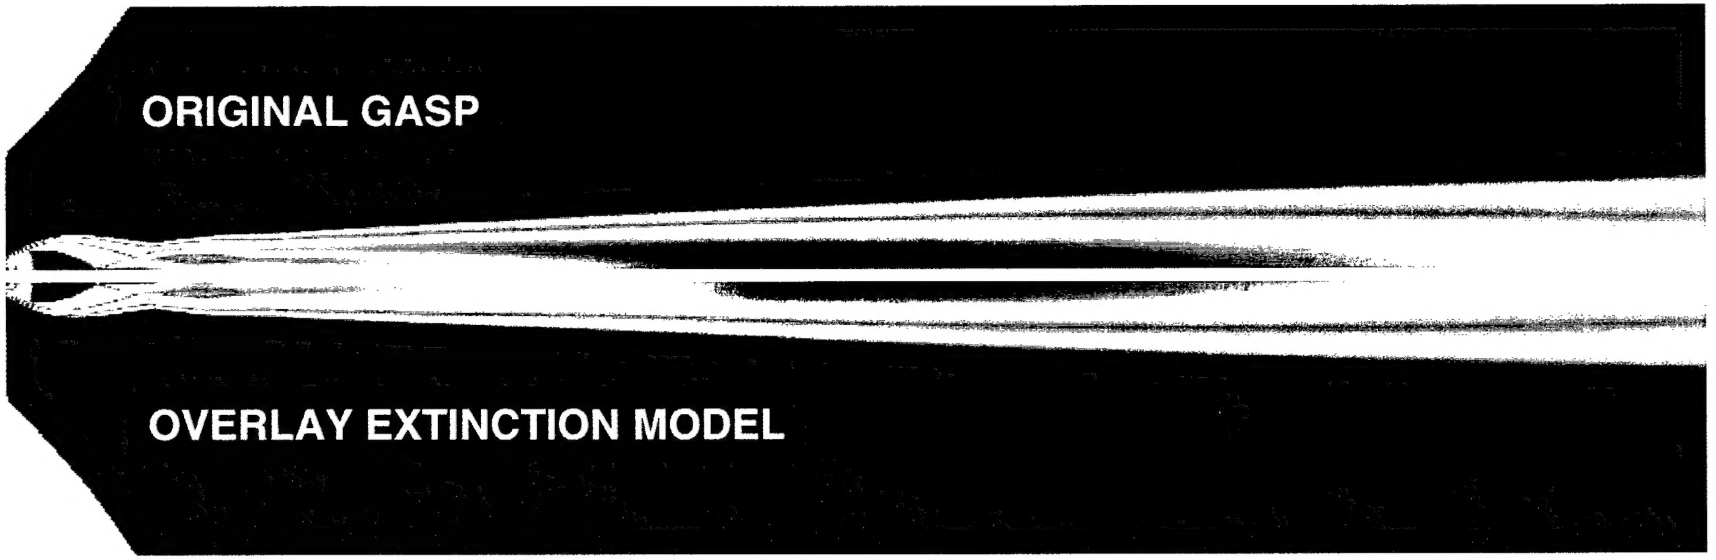



EFFECT OF EXTINCTION MODEL ON SPATIAL RADIANT INTENSITY PREDICTIONS AT 30 KM

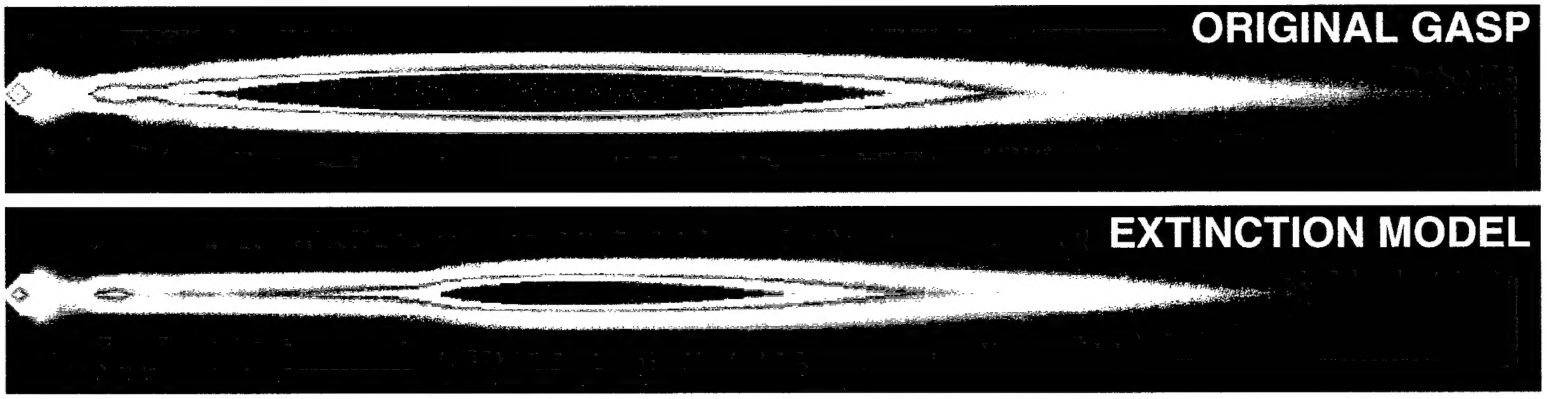

CONCLUSIONS

- RELAMINARIZATION MECHANISM IMPLAUSIBLE DUE TO HIGH PLUME CORE AND SHEAR LAYER TEMPERATURES
- DAMKOHLER EFFECT IS THE ONLY MECHANISM MODELED WITHIN MOST COMMERCIALLY AVAILABLE CODES, AND GENERALLY RESULTS IN GRADUAL SHUTDOWN EVENT
- CLASSICAL FLAME EXTINCTION MODEL FOUND TO PRODUCE RAPID AFTERBURNING SHUTDOWN EVENT AND SIGNIFICANTLY MODIFY RADIATIVE EMISSIONS CHARACTERISTIC
- FLAME EXTINCTION MECHANISM IS A PREVIOUSLY UNRECOGNIZED PHENOMENA OCCURRING IN ROCKET EXHAUST PLUMES